



# TECHNICAL SHEET

## AUTOTROL PERFORMA CONTROL VALVE 460 SERIES





## AUTOTROL PERFORMA CONTROL VALVE - 460 SERIES

### 460 TIME CLOCK CHARACTERISTICS



- Simple, precise electronic time clock (chronometric)
- 1- or 30-day regeneration setting
- 12 V operation
- Filter or softener setting in one control
- Operates 255, 263 and 268 with one controller

### 460i VOLUMETRIC CHARACTERISTICS



- Same features as the 460 Time Clock, plus:
  - Capacity setting
  - Calendar override
  - 7 days variable reserve
  - 12 V operation
  - Filter or softener setting in one control
  - Operates 255, 263 and 268 with one controller

## TECHNICAL SPECIFICATIONS

### VALVE SPECIFICATIONS

Valve Body	Glass-filled thermoplastic – NSF Listed material
Rubber Components	Compounded for cold water – NSF Listed material
Valve Materials Certification	WQA Gold Seal Certified to ORD 0902, NSF/ANSI 44, CE, ACS
Weight (Valve with Control)	2.42 kg (5.34 lbs)
Recommended Operating Pressure	1.38 - 8.27 bar (20-120 psi)
Hydrostatic Test Pressure	20.69 bar (300 psi)
Water Temperature	2-38°C (35-100°F)
Ambient Temperature*	2-48.9°C (35-120°F)
Controller Operating Voltage	12 VAC (Requires use of Pentair-supplied transformer)
Input Supply Frequency	50 or 60 Hz (Controller configuration dependent)
Motor Input Voltage	12 VAC
Controller System Power Consumption	3 W average

\* Recommend use of outdoor cover for direct sunlight applications



## TRANSFORMER – ALL CONTROLLERS

Transformer Output Voltage	12 VAC 150 mA
Transformer Input Options	230 VAC 50/60 Hz
Transformer Input Options	United Kingdom Plug Mainland Europe Plug

All Controllers require the use of a Pentair-supplied transformer.  
Additional transformers may be available – call for more information.

## FLOW RATES (VALVE ONLY)

Service @ 1.03 bar (15 psi) drop	5.7 m <sup>3</sup> /h (25.0 gpm)
Backwash @ 1.72 bar (25 psi) drop	4.5 m <sup>3</sup> /h (20.0 gpm)
Service	Kv = 5.6 (Cv = 6.50)
Backwash	Kv = 3.5 (Cv = 4.00)

## VALVE CONNECTIONS

Tank Thread	2½ inches – 8, male
Inlet/Outlet Threads	1¾ inch – 12 UNC-2A male
Drain Line	¾ inch NPT, male
Brine Line	¾ inch NPT, male
Distributor Tube Diameter	27 mm (1.050 inch)
Distributor Tube Length	13 ± 13 mm (½ ± ½ inch) above top of tank

## OPTIONS


Turbine for Demand Units	Internal Standard Autotrol 25 mm (1-inch) turbine
Bypass Valve, Model 1265	Thermoplastic, 1-inch flow path

### Bypass Fitting Kits:

• Copper, Sweat Tube Adapter	32, 25 or 19 mm (1¼, 1 or ¾ inch)
• CPVC, Solvent Weld Tube Adapter	25 or 19 mm (1 or ¾ inch)
• Plastic NPT or BSPT Pipe Adapter	25 or 19 mm male (1 or ¾ inch)
• Stainless steel NPT or BSPT Pipe Adapter	25 or 19 mm male (1 or ¾ inch)
• Brine Refill Controls	0.14 gpm (0.53 Lpm) fixed; 0.33 gpm (1.25 Lpm) fixed 0.74 gpm (2.8 Lpm) fixed; 1.3 gpm (4.92 Lpm) fixed




## DIMENSIONS

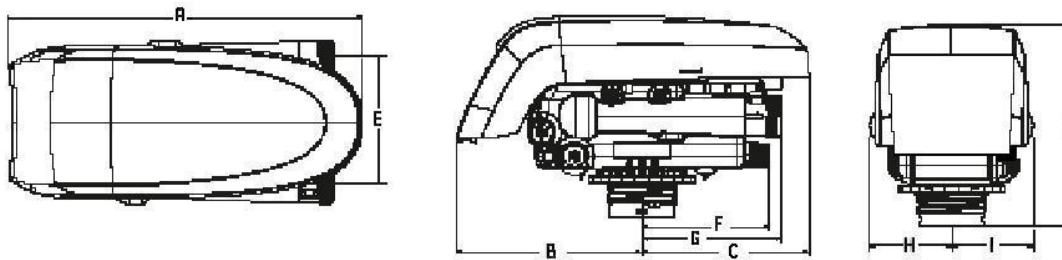

Units	A	B	C	D	E	F	G	H	I
cm	37.8	19.9	17.9	21.5	12.7	13.5	14.8	8.7	8.7
inches	14.9	7.8	7.1	8.5	5.0	5.3	5.8	3.4	3.4

## PERFORMANCE

### FLOW RATE vs PRESSURE DROP

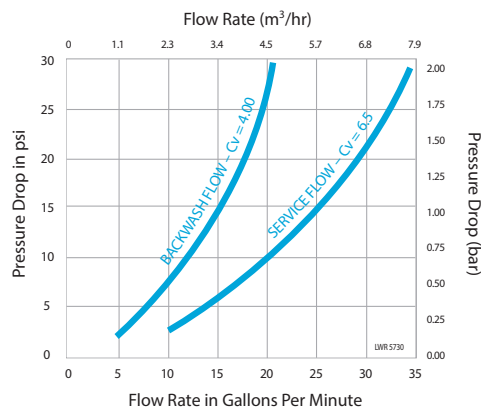

### BACKWASH FLOW CONTROL





Backwash number*	Flow Rate (gpm)	Flow Rate (Lpm)
7	1.30	4.90
8	1.70	6.40
9	2.20	8.30
10	2.70	10.20
12	3.90	14.76
13	4.50	17.00
14	5.30	20.00

\* Backwash flow controls sized for 5.0 gpm/sq. ft.



## INJECTOR\* PERFORMANCE

### 460 SERIES CONTROLLERS

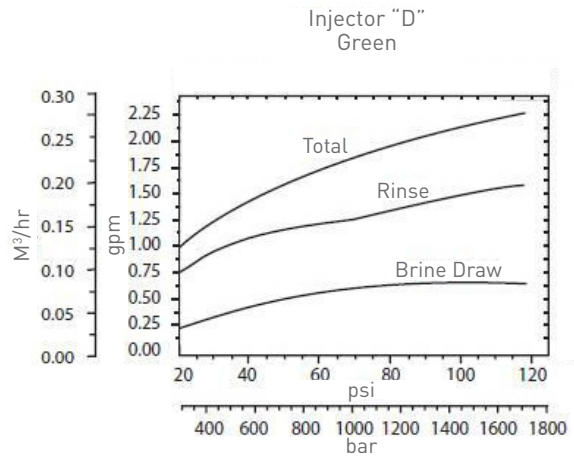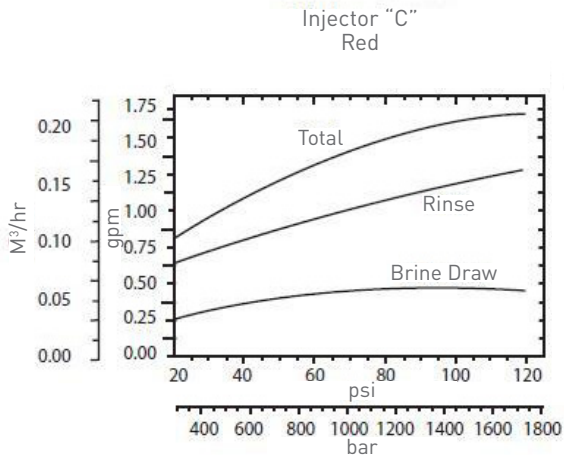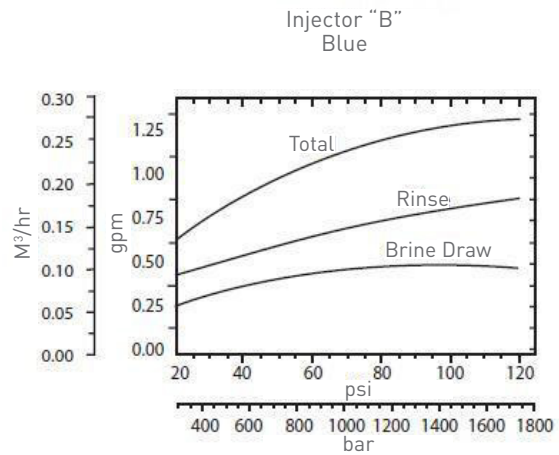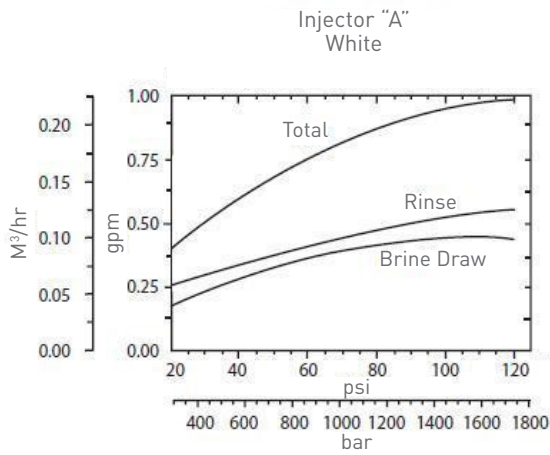

\*New injectors for high-efficiency regeneration sequence are standard with 460 Controllers.

NOTE: Actual injector performance is dependent on the resin used, tank geometry, elevated drain, etc. This injector data was taken using an empty tank (no resin).

## Contact us:

### By mail

---

#### Commercial support

[commercial.prfemea@pentair.com](mailto:commercial.prfemea@pentair.com)

#### Technical support

[techsupport.water@pentair.com](mailto:techsupport.water@pentair.com)

#### Marketing support

[marketing.prfemea@pentair.com](mailto:marketing.prfemea@pentair.com)

### By phone

---

Tel. +41 21 623 69 69